



ELEGANT HOME EXTERIOR



THE SECRETARIAT SERIES

COLORS

SOLID VINYL COLORS



White



Tan

LAMINATED EXTERIORS



Black




Bronze

GLASS

IntelliGlass
high performance

Glass Panes: 2
Low-E Surfaces: 1



SCAN FOR MORE
INFORMATION

GRIDS



Colonial



Perimeter



Prairie



Valance

SCREENS



Standard
1/2 Screen



513.618.6404
859.992.7363

ELEGANTHOMEEXTERIOR.COM

WINDOW+DOOR
TOP 100
MANUFACTURERS



Fenestration & Glazing
Industry Alliance



4600 08-23 Information accurate at time of printing. Product subject to change. ©2023 Vinylmax LLC

THE SECRETARIAT SERIES

PRODUCT RATING:

R-PG50

(Double Strength Glass)

R-PG45 (Single Strength Glass)

AIR INFILTRATION: .12
150% better than FGIA standard

SIZE LIMITS

4600 Double Hung	Width	Height	UI*
Minimum	14"	24"	38"
Maximum	52"	98"	132"

MAXIMUM TRIPLE PANE SIZE

50" width x 80" height

*United Inches = Width + Height

AVAILABLE STYLES



Double Hung



Picture Window




Shapes



Single Slider



2 Lite Slider




3 Lite Slider

PRODUCT FEATURES

- 3-1/4" Frame with beveled exterior
- Multi-chambered fusion welded vinyl
- IdeaSeal™ triple protection - integral interlock, sill compression seal and weatherstripping
- Dual function partitioned sloped sill
- Chisel bevel interior sash profiles
- Double weatherstripping on sashes
- Integral lift rails
- BioMaxx lead-free composite locks & keepers
- Flush mount tilt latches
- ASTM forced entry rated night locks
- Concealed sash stop system
- Stainless steel constant force balances
- Metal cam balance shoe
- Full balance covers
- BetterVue® screen mesh
- Tape glazed
- Intercept® Spacer System
- Black or bronze exterior laminates on white
- IntelliGlass High Performance LowE
- Dual Pane Glass
- Limited Lifetime Warranty



ENERGY STAR® for Windows, Doors, and Skylights
CLIMATE ZONE MAP

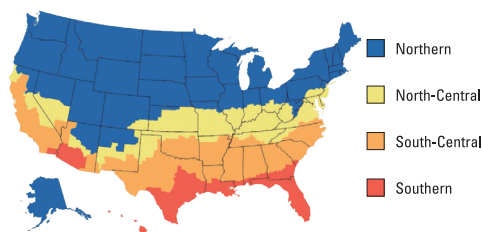

4600 Double Hung	U Value	SHGC	VLT	Energy Star
IntelliGlass Low E / Argon	.28	.38	.53	N NC

Above values are for SS glass, Argon, Intercept Spacer, no grids, no reinforcement.

U-Value measures the rate of heat transfer and tells you how well the window insulates. The lower the U-Value, the better the window insulates.

Solar Heat Gain Coefficient measures the fraction of solar energy transmitted and tells you how well the product blocks heat caused by sunlight. SHGC is measured on a scale of 0 to 1. The lower the SHGC, the less solar heat the window transmits.

Visible Light Transmittance measures the fraction of visible light transmitted through the window. The higher the Visible Light Transmittance, the more light shines through.



ELEGANT HOME
EXTERIOR

513.618.6404
859.992.7363

ELEGANTHOMEEXTERIOR.COM

